



ECONOMICAL BAGGING SCALE

MODEL OM-2 SERIES

Magnum Systems' Model OM-2 Series uses a patented beam scale and is self-dampening. The weight pointer and calibration adjustment are located directly on the beam. The OM-2 Series flow control regulates the speed of material going through the scale. The series includes both manual mechanical and automatic air/electric models.

SIMPLE AND ACCURATE GRAVITY WEIGH SCALE

Features

- Mechanical beam scale operation
- Non-concentric bag clamp for positive grip (OM-2)
- Pneumatic bag clamp with auto-bag release (OM-2A)
- Adjustable flow gate

Optional Features

- Stainless steel construction
- Shock absorber
- Belt feeder
- Valve bag adapter
- Integrate sealing, conveying, and palletizing equipment for a complete automated system

Materials Typically Handled

- Dry, granular, free-flowing products:
 - Wheat
 - Feed mixes
 - Granular fertilizer
 - Cracked corn
 - Deer corn mixes

OM-2



OM-2A



ECONOMICAL BAGGING SCALE

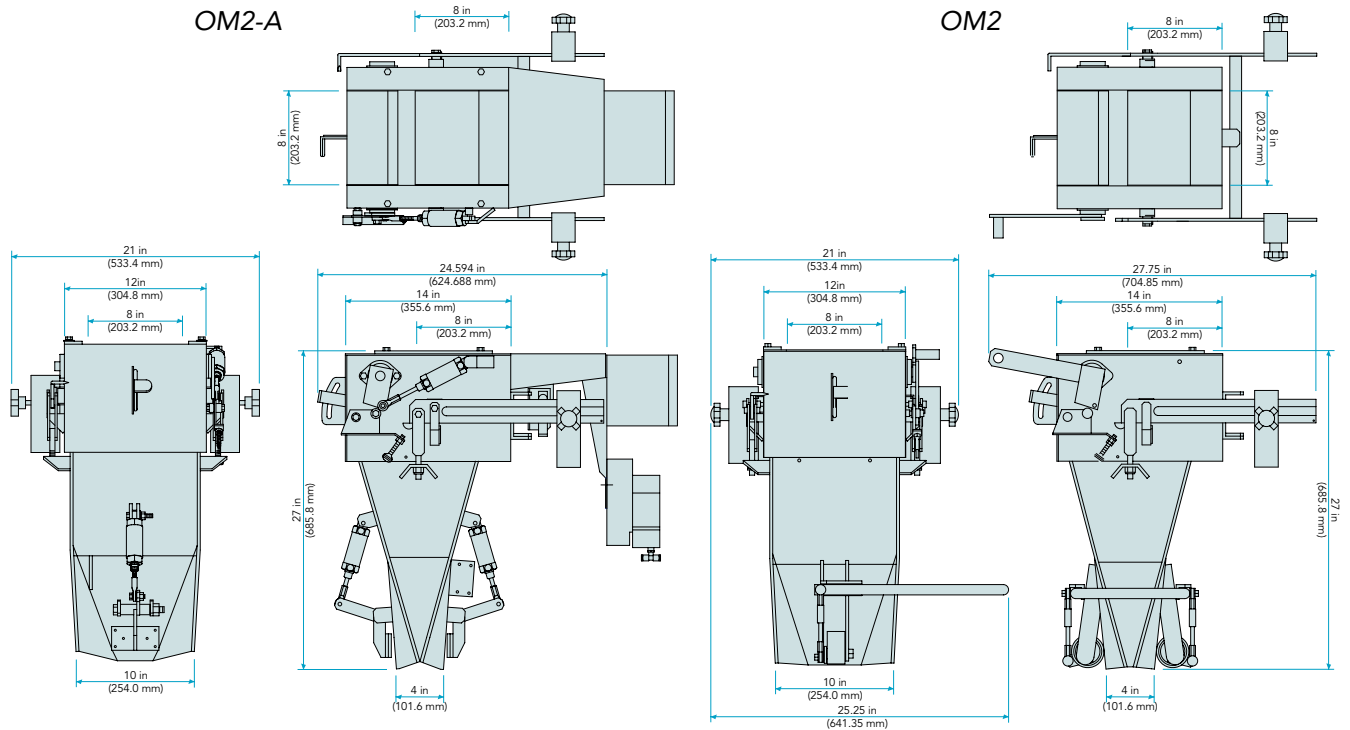


Diagram dimensions are for reference only*

SPECIFICATIONS

Speed	Up to 15 BPM
Accuracy	± 0.5 lb
Weight Range	15 to 125 lb (6.8 to 56 kg) (Weight range is dependent on product's bulk density. Free product testing recommended.)*
Configuration	Gross & net weigh (Net weigh configuration requires an optional weigh bucket)
Construction	Carbon steel
Paint	Magnum Systems blue: RAL 5015
Electrical Requirements	115 volt, single phase (OM-2A ONLY)
Air Requirements	100 PSI (6.29 BAR), 2 CFM (OM-2A ONLY)

OM-2 SYSTEM EXAMPLE

